



Test Report

Test Report No. IE1805-010T2

Date of Issue: 6th June, 2018

FCC Part 15 Subpart B

Radio Frequency Devices

Applicant Information

Name of Applicant	:	JAI CORPORATION
Address	:	10-35 Sakae-Chou, Kanagawa-Ku, Yokohama, Kanagawa, 221-0052 Japan
Telephone	:	+81 45-440-0165
Facsimile	:	+81 45-440-0167
Equipment under Test (EUT)	:	CMOS AREA SCAN CAMERA
Model Number	:	SP-12401M-PGE
Serial Number	:	U 120309
EUT Condition	:	Pre-Production

Date of Test : 23rd May, 2018

Test Result : **PASS**

- The results in this report are applicable only to the equipment tested.
- This report shall not be reproduced except in full without written acceptance of ISHIKAWA Co., Ltd.

Signature: _____

Kazuo Okada
Technical Group Manager

Table of Contents

1. Summary of Test	3
2. Equipment under Test	4
3. Configuration of Equipment	5
4. Radiated Emission	7
5. Photographs	13
6. Laboratory Description	15

1. Summary of Test

1.1. Test Standard

FCC Part15 SubpartB (§ 15.107, § 15.109) ClassB

1.2. List of Applied Test to the EUT

Test Item	Test Method	Test
Conducted Emission at Mains Port	ANSI C63.4:2014	N/A*
Radiated Emission	ANSI C63.4:2014	Applied

*: These tests are not applicable as per customer's request.

1.3. Test Procedure

Test Item	Test Procedure	Internal Test Procedure
Radiated Emission	ANSI C63.4:2014 / Clause 8	IT04-P007 Rev. 3.02 IT04-P009 Rev. 4.02

2. Equipment under Test

2.1. EUT Information

No.	EUT	Manufacturer	Model No.	Serial No.	FCC ID / DoC
A	CMOS AREA SCAN CAMERA	JAI CORPORATION	SP-12401M-PGE	U 120309	None

Note : The EUT was tested as tabletop.

Internal Max. Frequency : 400 MHz

EUT Clock Frequency	Oscillator	Clock Frequency	Name of Board	Note
	74.25 MHz	297 MHz	Main Board	—
	25 MHz	400 MHz	Main Board	—

Power Rating :

PoE DC 36 – 57 V, 7.7 W

DC IN DC 12 – 24 V, 6.1 W

Port(s)	Connector Type	Connector Pin
Ethernet connector	RJ-45	8 Pins

Dimensions of the EUT	Width (mm)	Depth (mm)	Height (mm)
	44	53	44

Weight of the EUT	Weight (kg)
	0.15

2.2. Variation in the product family


Model Name	Manufacturer	Model No.
CMOS AREA SCAN CAMERA	JAI CORPORATION	SP-12401C-PGE

Note: The model SP-12401M-PGE is higher than the image resolution of the SP-12401C-PGE.

Therefore, only the SP-12401M-PGE has been tested.

2.3. Operating Mode

• Continuous Mode

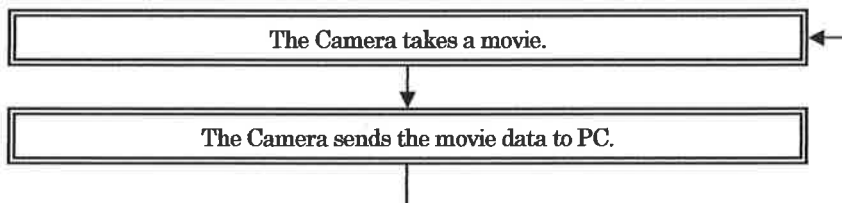

3. Configuration of Equipment

3.1. Peripherals used

No.	Equipment	Manufacturer	Model No.	Serial No.	FCC ID / DoC
B	LENS	RICOH	TV LENS 12.5mm 1:1.4	327520	None
C	LCD MONITOR	DELL	E2417H	CN-0VJ9GK-74261-68M-1F7U-A00B0-120	DoC
D	Personal Computer	DELL	Precision Tower 5810	GRCPB22	DoC
E	KEYBOARD	DELL	KB212-B	CN-0N290F-71581-5A9-07J2-A01	DoC
F	MOUSE	DELL	MS-111-L	CN-09RRC7-48729-54S-0RKM	DoC

3.2. Cables used


AC Power Cable

No.	Cable(s) Name	Length (m)	Shielding	Ferrite Core	Comment
1	AC Power Cable for LCD MONITOR	1.5	Unshielded	None	—
2	AC Power Cable for Personal Computer	1.5	Unshielded	None	—

Interface Cable

No.	Cable(s) Name	Length (m)	Shielding	Ferrite Core	Comment
3	LAN Cable	7.0	Shielded	None	—
4	LCD MONITOR Cable	1.7	Shielded	None	—
5	KEYBOARD Cable	2.0	Shielded	None	—
6	MOUSE Cable	1.5	Shielded	None	—

3.3. System Configuration

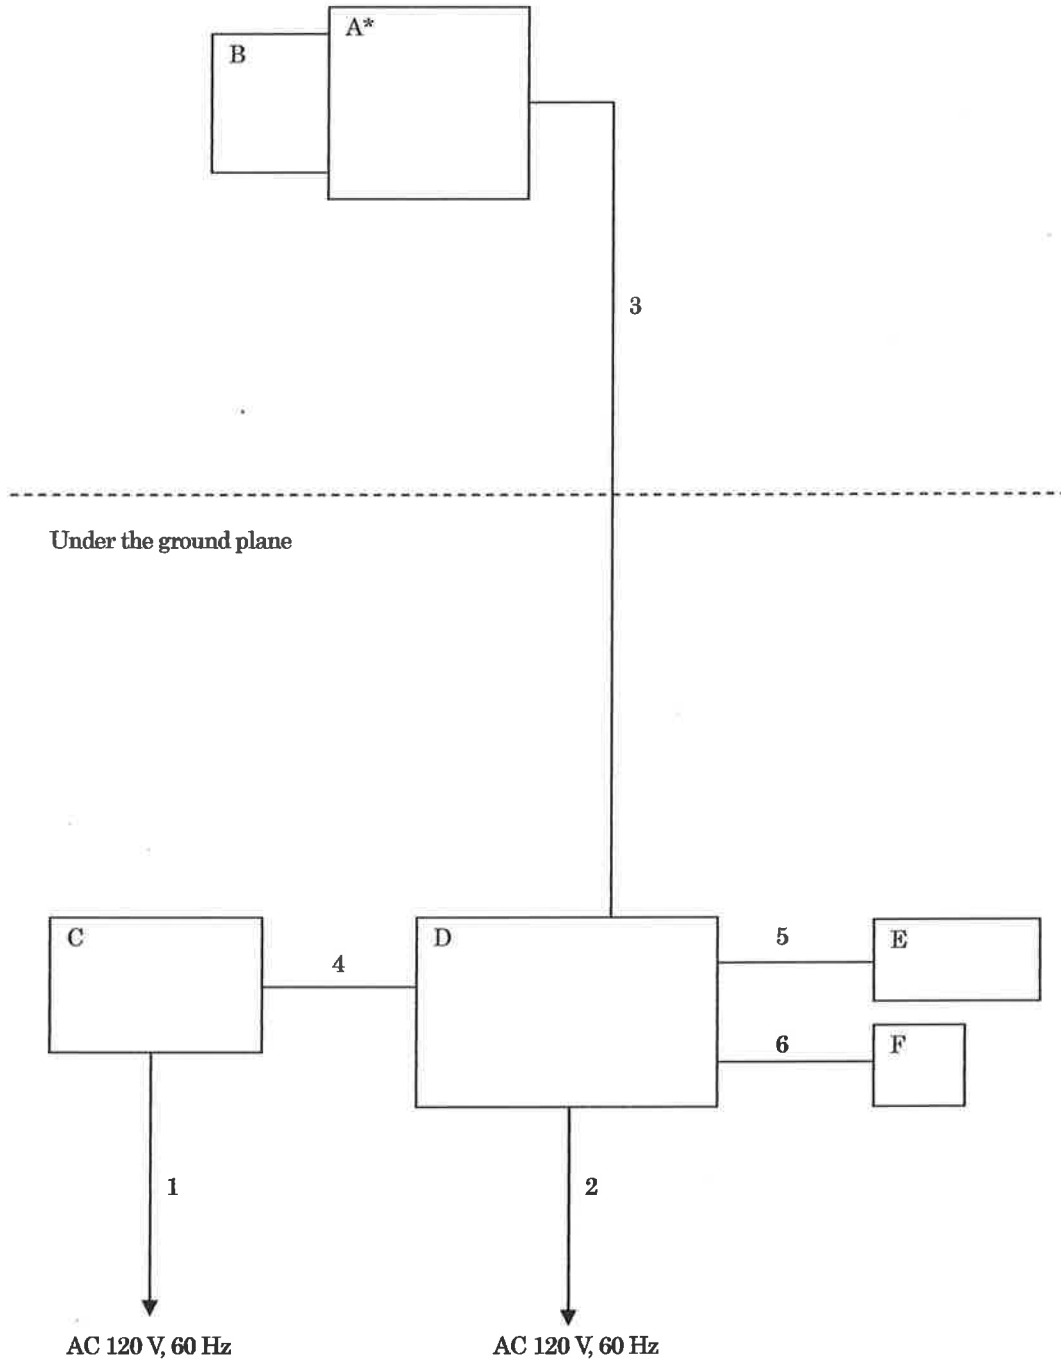

*: EUT



4. Radiated Emission

4.1. Measurement Procedure

4.1.1. Test Receiver Condition

Below 1000 MHz:	Detector: Quasi-peak Bandwidth: 120 kHz
Above 1000 MHz:	Detector: Average, Peak Bandwidth: 1 MHz

4.1.2. Frequency Range

30 MHz – 2000 MHz

4.1.3. Measuring Distance

3 m

4.1.4. Turn Table

Rotated 0 to 360 degrees



4.1.5. Antenna Position

Antenna height:	1 m to 4 m
Polarization	Horizontal and Vertical

4.1.6. Reported Emissions

At least the 6 points corresponding to the highest disturbance are reported.

4.1.7. Test Configuration

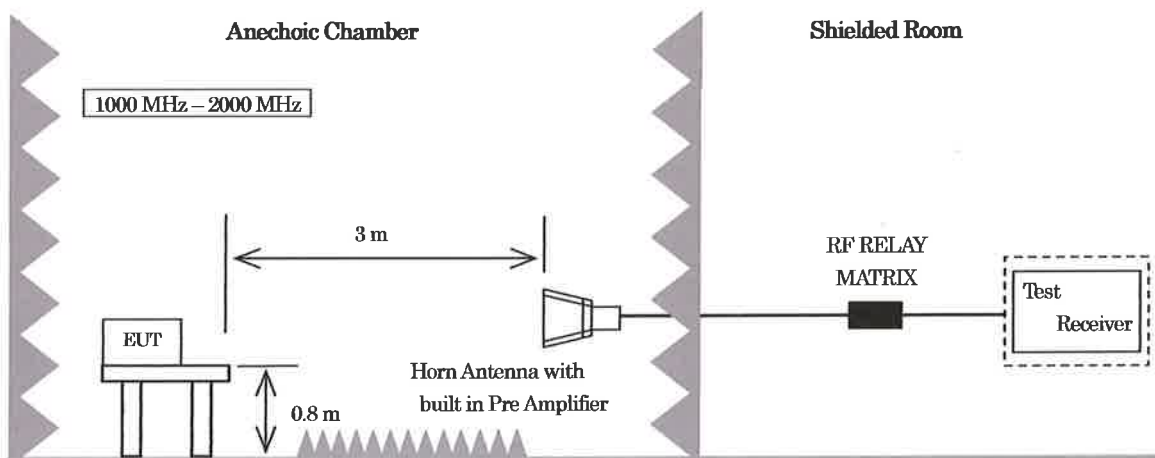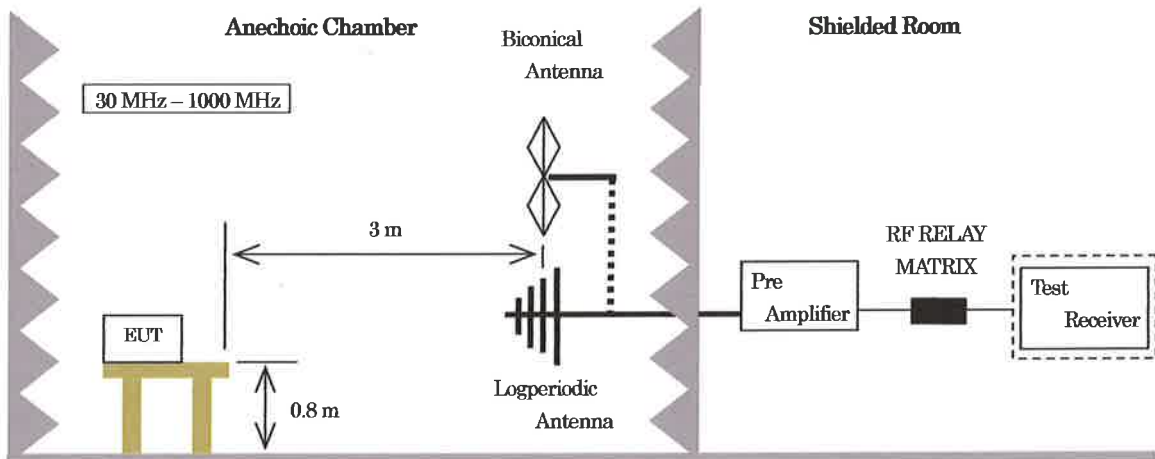

4.2. Test Equipment

Equipment	Manufacturer	Model No.	Serial or ID No.	Calibration Due
Test Receiver	Rohde & Schwarz	ESU26	100299	May-2019
Pre Amplifier	Sonoma	310N	243232	Aug-2018
RF RELAY MATRIX	tsj	RFMI2A2M	03153	Aug-2018
Biconical Antenna	Schwarzbeck	BBA9106(VHA9103)	91032277	Feb-2019
Logperiodic Antenna	Schwarzbeck	UHALP9108A	0720	Feb-2019
Horn Antenna	EMCO	3115	8912-3303	Dec-2018
Pre Amplifier for Horn Antenna	tsj	MLA-0108AD-39	005	Dec-2018
Attenuator	SUHNER	6803.17.A	003	Aug-2018
Attenuator	SUHNER	6803.17.A	004	Aug-2018
Coaxial Cable (1)	SUHNER	RG400	259	Aug-2018
Coaxial Cable (2)	SUHNER	RG400	260	Aug-2018
Coaxial Cable (3)	SUHNER	S04272B	612	Aug-2018
Coaxial Cable (4)	SUHNER	S04272B	376	Aug-2018
Coaxial Cable (5)	SUHNER	SF106	32550/6	Aug-2018
Coaxial Cable (6)	SUHNER	SF104EA	MY4490/4EA	Aug-2018
Software	tsj	TEPTO-DV/RE	v1.90.0098	N/A

Note 1: All testing equipment is calibrated with measuring equipment which are traceable to national or international standards.

Note 2: The pre-amplifier is connected to the horn antenna. (3115)

4.3. Sample Calculation

Radiated Emission Class B Limit*

Frequency Range (MHz)	Limit(dBuV/m)
	Quasi Peak
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
960 – 1000	54.0

*: The lower limits apply at the transition frequency.

Radiated Emission Class B Limit

Frequency range (MHz)	Limit(dBuV/m)	
	Average	Peak
Above 1000	54.0	74.0

• Example @ 42.318 MHz for Continuous Mode.

$$\begin{array}{rcl}
 \text{Disturbance Level} & = & \text{Reading} & 41.7 & \text{dBuV} \\
 & + & \text{Correction Factor*} & + & -10.3 & \text{dB/m} \\
 & & & = & 31.4 & \text{dBuV/m}
 \end{array}$$

$$\begin{array}{rcl}
 \text{Margin} & = & \text{Limit} & 40.0 & \text{dBuV/m} \\
 & - & \text{Disturbance Level} & - & 31.4 & \text{dBuV/m} \\
 & & & = & 8.6 & \text{dB}
 \end{array}$$

*: Correction Factor = Antenna Factor (dB/m) + Cable Loss (dB) [include 3dB attenuator×2] – Pre Amplifier Gain (dB)

Note: The sample calculation above is the minimum margin at the measuring frequency.

4.4. Uncertainty

Expanded uncertainties were calculated with a coverage factor k = 2 for Radiated Emission.

• 30 MHz – 1000 MHz +3.48 dB / -3.02 dB

• 1000 MHz – 8000 MHz +3.73 dB / -3.80 dB

4.5. Test Data

Radiated Emission


10m A/C
 Date : 2018/05/23 12:35

Model Name : CMOS AREA SCAN CAMERA
 Model No. : SP-12401M-PGE
 Serial No. : U 120309
 Test Condition : Continuous Mode

Data No. : IE1805-010A-13
 Power Supply : PoE(DC 48V)
 Temp./Humi. : 22°C / 42%
 Operator : T. Akiyama

Memo :

LIMIT : FCC Part15 SubpartB ClassB(3m)

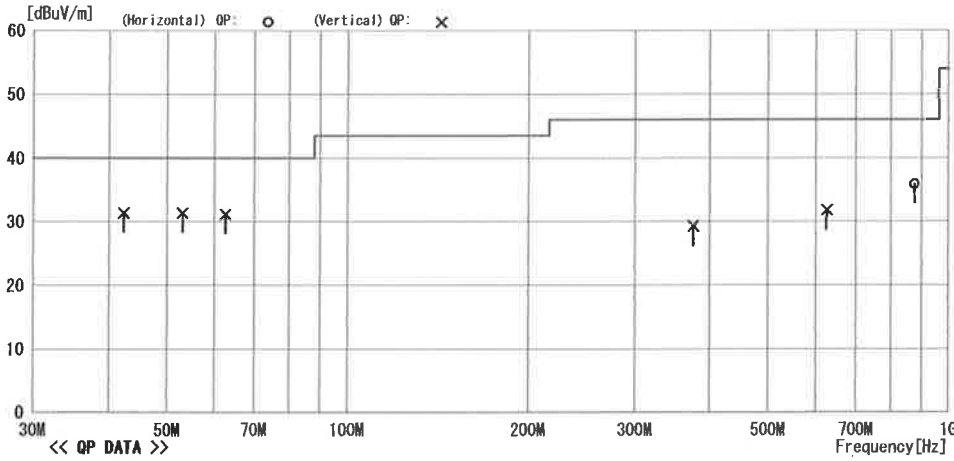

No	Freq.	Reading	Ant. Fac	Loss	Gain	Result	Limit	Margin	Pol.	Height	Angle	Ant
	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[H/V]	[cm]	[deg]	Type
1	42.318	41.7	13.8	7.6	31.7	31.4	40.0	8.6	Vert.	100	120	BIC
2	53.024	45.2	10.0	7.8	31.6	31.4	40.0	8.6	Vert.	100	270	BIC
3	62.611	47.7	7.2	7.9	31.6	31.2	40.0	8.8	Vert.	100	359	BIC
4	374.995	35.1	15.3	10.4	31.5	29.3	46.0	16.7	Vert.	150	193	LPD
5	624.997	32.8	19.0	11.7	31.7	31.8	46.0	14.2	Vert.	133	12	LPD
6	874.996	33.1	21.4	12.8	31.4	35.9	46.0	10.1	Hori.	105	227	LPD


Radiated Emission

10m A/C
 Date : 2018/05/23 16:44

Model Name : GMOS AREA SCAN CAMERA	Data No. : IE1805-010A-25
Model No. : SP-12401M-PGE	Power Supply : PoE (DC 48V)
Serial No. : U 120309	Temp/Humi : 22°C / 42%
Test Condition : Continuous Mode	Operator : T. Akiyama

Memo :

LIMIT : FCC Part15 SubpartB ClassB(3m)Peak

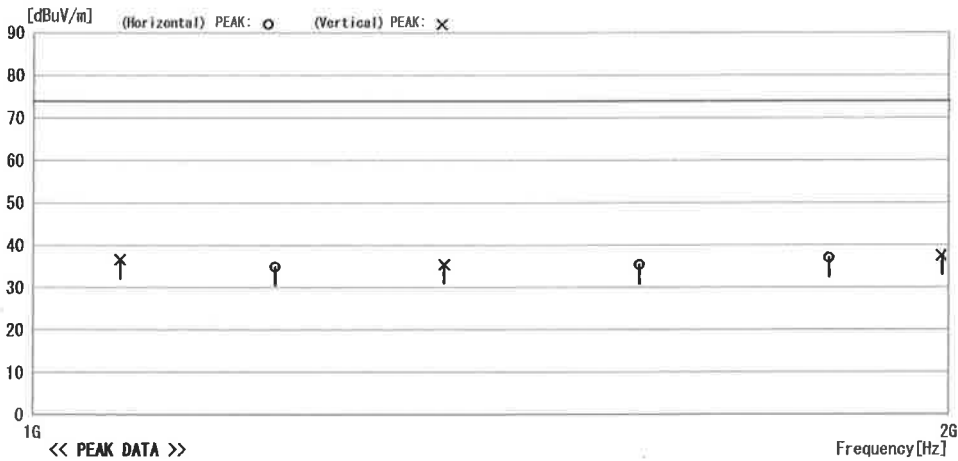

No	Freq.	Reading	Ant. Fac	Loss	Gain	Result	Limit	Margin	Pola.	Height	Angle	Ant
	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[H/V]	[cm]	[deg]	Type
1	1068.088	45.4	26.5	6.1	41.3	36.7	74.0	37.3	Vert.	100	193	HOR
2	1201.005	43.7	26.2	6.5	41.5	34.9	74.0	39.1	Hori.	400	225	HOR
3	1364.608	44.2	26.0	7.0	41.7	35.5	74.0	38.5	Vert.	100	357	HOR
4	1582.299	43.8	26.1	7.5	42.0	35.4	74.0	38.6	Hori.	100	301	HOR
5	1824.594	43.7	27.4	8.0	42.1	37.0	74.0	37.0	Hori.	250	277	HOR
6	1987.919	43.3	28.0	8.4	42.2	37.5	74.0	36.5	Vert.	400	1	HOR




Radiated Emission

Date : 2018/05/23 16:44 10m A/C

Model Name : CMOS AREA SCAN CAMERA	Data No. : IE1805-010A-26
Model No. : SP-12401M-PGE	Power Supply : PoE(DC 48V)
Serial No. : U 120309	Temp/Humi : 22°C / 42%
Test Condition : Continuous Mode	Operator : T. Akiyama

Memo :

LIMIT : FCC Part15 SubpartB ClassB (3m)

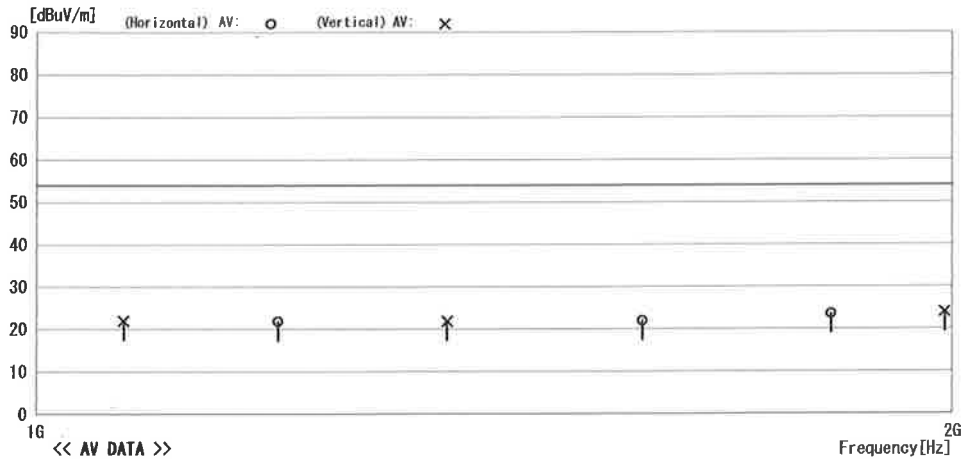

No	Freq.	Reading	Ant. Fac	Loss	Gain	Result	Limit	Margin	Pola.	Height	Angle	Ant
	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[H/V]	[cm]	[deg]	Type
1	1068.088	30.7	26.5	6.1	41.3	22.0	54.0	32.0	Vert.	100	193	HOR
2	1201.005	30.6	26.2	6.5	41.5	21.8	54.0	32.2	Hori.	400	225	HOR
3	1364.608	30.6	26.0	7.0	41.7	21.9	54.0	32.1	Vert.	100	357	HOR
4	1582.299	30.4	26.1	7.5	42.0	22.0	54.0	32.0	Hori.	100	301	HOR
5	1824.594	30.3	27.4	8.0	42.1	23.6	54.0	30.4	Hori.	250	277	HOR
6	1987.919	29.8	28.0	8.4	42.2	24.0	54.0	30.0	Vert.	400	1	HOR



5. Photographs

5.1. Radiated Emission

- 30 MHz – 1000 MHz





• 1000 MHz – 2000 MHz



ISHIKAWA Co., Ltd. EMC Laboratory
2-3-18, Namamugi, Tsurumi-ku, Yokohama, Kanagawa 230-0052 Japan
TEL: +81 45-500-2255 FAX: +81 45-500-2256

6. Laboratory Description

6.1. Location

ISHIKAWA Co., Ltd. EMC Laboratory
2-3-18, Namamugi, Tsurumi-ku, Yokohama, Kanagawa 230-0052 Japan
TEL: +81 45-500-2255 FAX: +81 45-500-2256

6.2. Laboratory Equipment

Site Name	Shielded room Volume	Turn table	Weight-proof
Shielded room No. 1	4.9m×2.9m×2.8m	-----	-----
Shielded room No. 2	8m×5m×2.8m	-----	-----
10m Anechoic chamber	21.5m×13.5m×8.9m	4m diameter	3,000 kg
3m Anechoic chamber	9m×6m×5.7m	2m diameter	500 kg

6.3. Laboratory Filing or Certificate Information

6.3.1. VCCI Site Registration pursuant to V-5 & VCCI 32-2

Site Name	Registration No.	Expiry Date
ISHIKAWA Co., Ltd.	A-0105	July 14, 2019

6.3.2. FCC Site Filing pursuant to CFR 47 § 2.948

Site Name	Test Firm Registration No.	Expiry Date
ISHIKAWA Co., Ltd.	743690	July 14, 2019

6.3.3. VLAC Accreditation

Site Name	Accreditation No.	Expiry Date
ISHIKAWA Co., Ltd. EMC Laboratory	VLAC-025	July 14, 2019

6.3.4. TÜV Rheinland Certificate of Appointment Laboratory

Site Name	Registration No.	Expiry Date
ISHIKAWA Co., Ltd. EMC Laboratory	UA50060145-0014	June 1, 2019

6.3.5. Industry Canada site filing pursuant to RSS-Gen

Site Name	File No.	Expiry Date
10m Anechoic chamber	5804A-1	August 19, 2018
3m Anechoic chamber	5804A-2	August 19, 2018